the cost effective high performance solid tire

resilient tires FMCX

FMCX

FMCX, value and performance

FMCX is our standard range solid tire. FMCX combines advanced rubber compounding and tread design to produce a tire with good longevity and that delivers a high performance at a cost effective price. A three compound all rubber tire, FMCX provides a high performance solid tire solution.

Available in a range of popular sizes and compounds, FMCX represents excellent value through its whole life cost.

- **Good durability and longevity**
- **Good energy efficiency**
- **Good whole life value**
- **Creel bead wires to prevent rim slippage**

Cross section of FCMX tire

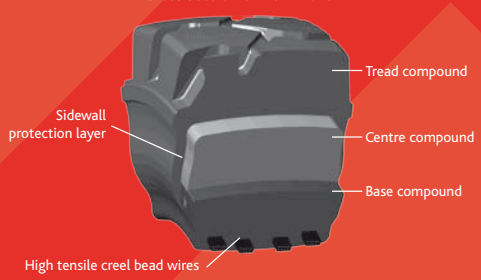

Watts

www.industrialtyre.com

value you can trust

FMCX specifications

the cost effective high performance solid tire

resilient tires FMCX specifications

Size	Rim Width	Tread Pattern	Tire loadings to E.T.R.T.O Load wheels up to 16kph kg	Steer wheels up to 25kph kg	Nominal Dimensions Overall Width mm	Overall Diam. mm
*4.00-8	3.00	RIB	950	730	99	409
*4.00-8	3.00	QZ4	950	730	102	400
15x4.5-8	3.00 / 3.25	RIB	1040	800	102	378
15x4.5-8	3.00 / 3.25	QZ4	1040	800	109	375
5.00-8	3.00	QZ4	1415	1090	124	444
16x6-8	4.33	QZ4	1270	975	138	409
18x7-8	4.33	QZ4	2145	1650	144	456
6.00-9	4.00	QZ4	1885	1450	133	520
21x8-9	6.00	QZ4	2755	2120	188	526
200/50-10	6.50	QZ4	2470	1900	194	453
6.50-10	5.00	QZ4	2340	1800	151	564
23x9-10	6.50	QZ4	3160	2430	197	568
23x10-12	8.00	QZ4	3770	2900	246	571
7.00-12	5.00	QZ4	2920	2240	166	650
27x10-12	8.00	QZ4	3900	3000	246	660
7.00-15	5.50	QZ4	3545	2725	167	714
7.50-15	5.50 / 6.50	QZ4	3900	3000	192	732
28x9-15	7.00	QZ4	3445	2650	204	686
250-15	7.00 / 7.50	QZ4	4745	3650	208	710
300-15	8.00	QZ4	5850	4500	251	808
350-15 (355/65-15)	9.75	QZ4	7085	5450	295	811
8.25-15	6.50	QZ4	4750	3650	206	801
*10.00-20	7.50 / 8.00	LB105	6000	5000	249	1013
*11.00-20	8.50	LB105	6540	5450	276	1075
*12.00-20	8.00 / 8.50	LB105	7560	6300	276	1075

All sizes have 3 part construction
All sizes available in Limpet except those marked (*)
All specifications are in accordance with E.T.R.T.O (European Tyre and Rim Technical Organisation)

QZ4

RIB

LB105

DISTRIBUTED BY

Watts Tyre Group
Church Road, Lydney
Glos. GL15 5EN UK
Tel: +44 (0)1594 847100
Fax: +44 (0)1594 842429
Email: enquiries@watts-tyres.co.uk
www.industrialtyre.com

Certificate No. Q 09672
BSEN ISO 9001:2000

Certificate No. EMS 87656
BSEN ISO 14001:2004